

Bucket Elevators

Line of Material
Handling Equipment,
Installation and
Electrical Service



Proudly Made in the U.S.A.



Custom Agri Systems, Inc.
255 County Road R
Napoleon, Ohio 43545
1-800-592-1434
www.casindustries.com



Custom Agri Systems, Inc.
www.casindustries.com

Standard Construction Includes:

- Trunking Flanges Welded Inside and Out 100%
- All Externally Mounted Pillow Block Roller Bearing
- Slide Out - Clean Out Doors For Easy Clean Up
- Head Section Main Body All Hot Dipped Galvanized
- Head Covers Vented, all Welded from G-90 Galvanized Steel
- Galvanized Boot Sections Have Elevated Bottom to Prevent Corrosion
- Heavy Anchoring Angles Build into the Boot Section
- Zinc Plated Alloy Steel ACME Rod Slack Adjusters
- UHMW Shaft Seals on all Shafts
- Stainless Steel Hinged Inspection and Slide Lagging Doors
- Slide Lagged and Crowned Head Pulleys Standard
- Crowned Smooth Steel Boots Pulleys - Winged Optional
- Standard Square Flanged Discharges on All Models



Boot Door



Flanges Welded Inside



Trunking



Slide Lagging




Installed Head



Installed Boot



Elevated Boot

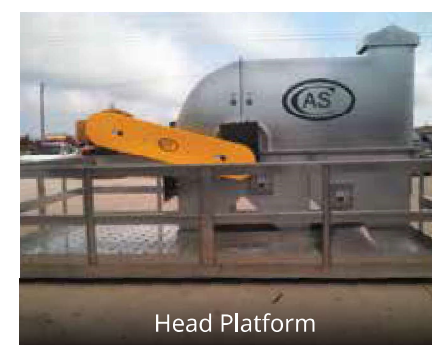

Head Platform



Pillow Block Bearing



Rack and Pinion - Clean Out Optional