


Line of Material
Handling Equipment,
Installation and
Electrical Service



Proudly Made in the U.S.A.

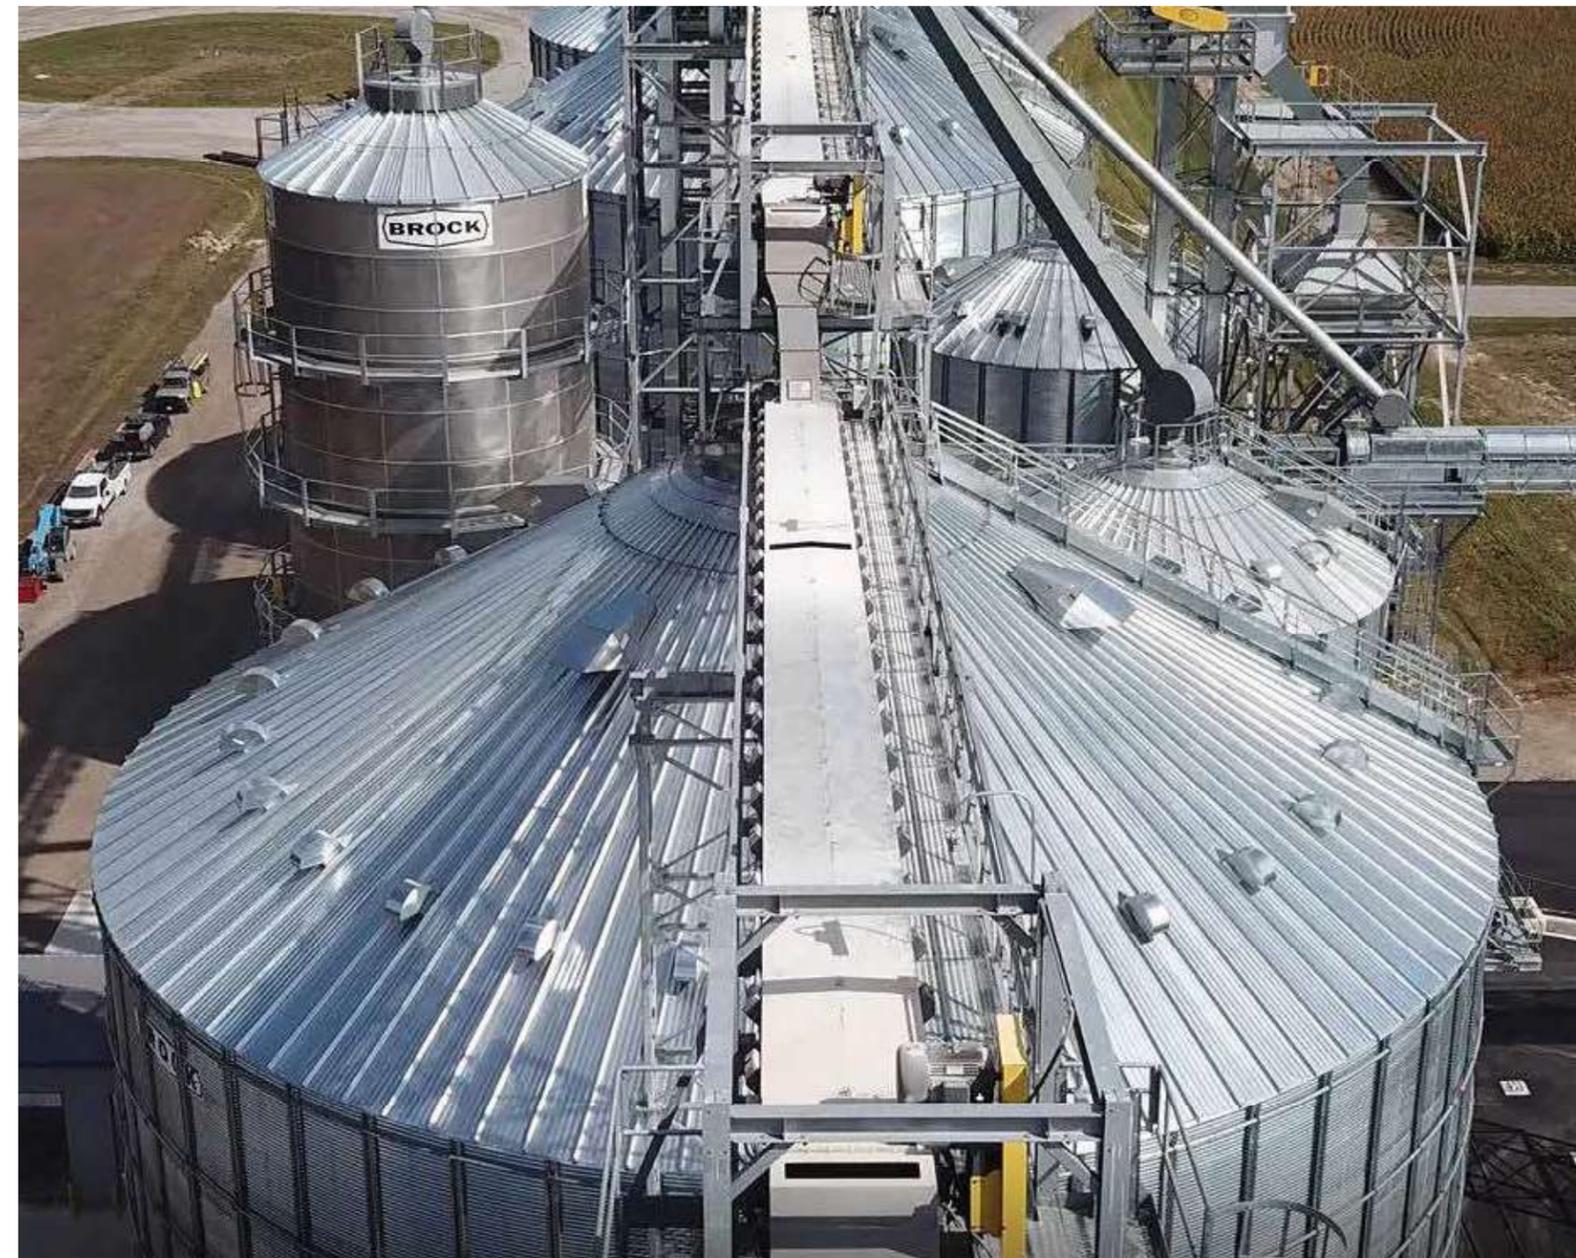

Custom Agri Systems, Inc.
255 County Road R
Napoleon, Ohio 43545
1-800-592-1434
www.casindustries.com



Custom Agri Systems, Inc.
www.casindustries.com

Standard Construction Includes:

- 10 Gauge Galvanized Steel Sides (G-90 Min. Thickness)
- NO Surface Mounted Flange Bearings — Only visible from 1 Side, Exposure to Inside Environment, or grease contamination to the inside of Conveyor
- NO Internal Bearings = Better Visual Inspections
- 1/2" Anti Static UHMW counter bored and bolted

12 Gauge Galvanized Crowned Covers, Ensures Proper Water Run Off, Clamped On for Easy Access, overlapping creating a shingle effect

- Patent Pending Externally, Outboard mounted pillow block bearing arrangement
- Shaft Seals to truly Isolate the bearing from inside dust environment
- Fire Retardant, Oil resistant, and static conductive rubber belting
- Only Concentric Locking Pillow Block Bearings Used, on All Idlers with 1 7/16" Minimum Shaft diameters
- Slide Lagged and Crowned Drive Pulleys with Outboard Concentric Adapter mounted Bearings and UHMW Seals
- Spiral Winged Tail Pulley with Outboard Concentric Adapter mounted Bearings and UHMW Seals



Patent Pending

